



Submarine Cable Double Armored

GJLTMM 12-192 fibers 25-ton DA / GJZLTMM 12-192 fibers 25-ton DA

Features

- Unrepeated
- Water depth 3000 m
- Compact design, only 28 mm in diameter
- 12-192 optical fibers
- With or without electroding conductor
- Double layer steel wire reinforcement
- Hydrogen protected
- Outer protection polypropylene yarns

Application

The 25-ton DA is a double layer armored, loose tube cable for submarine installation where high protection is required.

This submarine cable is based on a hermetically sealed stainless tube. Inside the tube the fibers are free to move in a thixotropic water blocking compound. The steel tube is protected by a polyethylene sheath. Outside the sheath there are two layers of galvanized steel wires. The steel wires are flooded in bitumen.


The complete cable is wrapped with a layer of polypropylene yarns.

The steel wire reinforcement provides reliable mechanical protection, enabling installation and operation during rough conditions.

High packing density of the fibers is provided by the loose tube technique. This permits a small outer diameter and easy handling of the cable.

The fibers are colored for easy identification.

Product Information

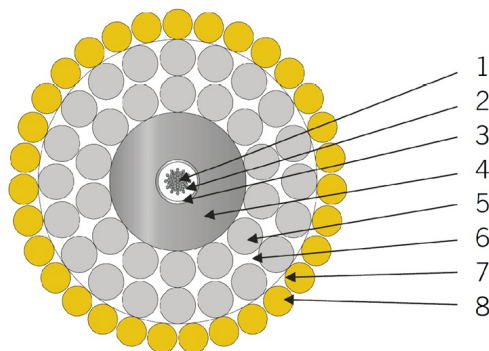

- 1 Primary coated fiber: Silica, acrylate
- 2 Filling compound: Thixotropic compound
- 3 Tube: Stainless steel
- 4 Sheath: Polyethylene, black
- 5 Armoring: Galvanized steel wires, double layer 14 x \varnothing 3.0 and 20 x \varnothing 3.0 mm
- 6 Filling compound: Bitumen
- 7 Wrapping: Plastic tape
- 8 Wrapping: Polypropylene yarns

Technical Information

Tuotteen väri	Yellow with black contrast yarns.
Lämpötila, käyttö [°C]	-30 to +60
Lämpötila, varastointi [°C]	-40 till +70
Lämpötila, asennus [°C]	-15 to +40
Halkaisija Ø [mm]	28
Max. Vedensyvyys [m]	3000
Taivutussäde, ei vetoa [mm]	500
Taivutussäde, vedossa [mm]	1500
Taivutussäde, useita kierroksia [mm]	1500
Paino [kg/km]	2300
Paino vedessä [kg/km]	1800
Vetolujuus UTS [kN]	320
Vetolujuus FBL [kN]	320
Vetolujuus NTTS [kN]	250
Vetolujuus NOTS [kN]	170
Vetolujuus NTPS [kN]	120
Puristuslujuus [N/100 mm]	20000
Isku [J]	300
Merkintä	The submarine cable is marked with kilometer markers and factory joint markers.
Tekniset tiedot	Mechanical and environmental test in accordance with IEC 60794-1-21 and IEC 60794-1-22
Tilaustiedot	<ul style="list-style-type: none"> ▪ Fiber specification ▪ Fiber count ▪ With or without electroding conductor ▪ Fiber color code <p>The cable is supplied in coil, on drum or in container.</p>