

# Submarine Cable Double Armored Heavy

GJLTTM 12-192 fibers 40-ton DAH / GJZLTTM 12-192 fibers 40-ton DAH

---

## Features

- Unrepeated
- Water depth 3000 m
- Compact design, only 32 mm in diameter
- 12-96 optical fibers
- With or without electroding conductor
- Double layer steel wire reinforcement
- Hydrogen protected
- Outer protection polypropylene yarns

## Application

The 40-ton DAH is a double layer armored, loose tube cable for submarine installation where high protection is required.

This submarine cable is based on a hermetically sealed stainless tube. Inside the tube the fibers are free to move in a thixotropic water blocking compound. The steel tube is protected by a polyethylene sheath. Outside the sheath there are two layers of galvanized steel wires. The steel wires are flooded in bitumen.


The complete cable is wrapped with a layer of polypropylene yarns.

The steel wire reinforcement provides reliable mechanical protection, enabling installation and operation during rough conditions.

High packing density of the fibers is provided by the loose tube technique. This permits a small outer diameter and easy handling of the cable.

The fibers are colored for easy identification.

## Product Information

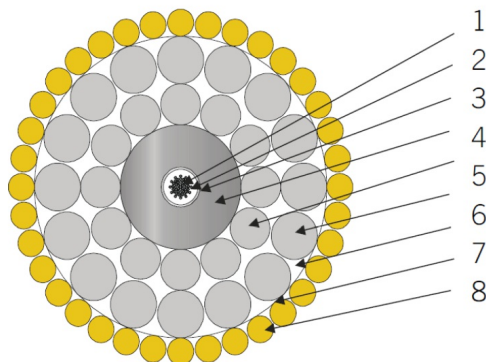

- 1 Primary coated fiber: Silica, acrylate
- 2 Filling compound: Thixotropic compound
- 3 Tube: Stainless steel
- 4 Sheath: Polyethylene, black
- 5 Armoring: Galvanized steel wires, double layer 12 x  $\varnothing$ 3.8 and 16 x  $\varnothing$ 4.4 mm
- 6 Filling compound: Bitumen
- 7 Wrapping: Plastic tape
- 8 Wrapping: Polypropylene yarns

## Technical Information

<b>Tuotteen väri</b>	Yellow with black contrast yarns.
<b>Lämpötila, käyttö [°C]</b>	-30 to +60
<b>Lämpötila, varastointi [°C]</b>	-40 till +70
<b>Lämpötila, asennus [°C]</b>	-15 to +40
<b>Halkaisija Ø [mm]</b>	32
<b>Max. Vedensyvyys [m]</b>	3000
<b>Taivutussäde, ei vetoa [mm]</b>	500
<b>Taivutussäde, vedossa [mm]</b>	1500
<b>Taivutussäde, useita kierroksia [mm]</b>	1500
<b>Paino [kg/km]</b>	3400
<b>Paino vedessä [kg/km]</b>	2700
<b>Vetolujuus UTS [kN]</b>	520
<b>Vetolujuus FBL [kN]</b>	520
<b>Vetolujuus NTTS [kN]</b>	400
<b>Vetolujuus NOTS [kN]</b>	260
<b>Vetolujuus NTPS [kN]</b>	200
<b>Puristuslujuus [N/100 mm]</b>	25000
<b>Isku [J]</b>	300
<b>Merkintä</b>	The submarine cable is marked with kilometer markers and factory joint markers.
<b>Tekniset tiedot</b>	Mechanical and environmental test in accordance with IEC 60794-1-21 and IEC 60794-1-22