



Submarine Cable Single Armored Light

GJLTM 12-192 fibers 5-ton SAL / GJZLTM 12-192 fibers 5-ton SAL

Features

- Unrepeatered
- Water depth 3000 m
- Compact design, only 20 mm in diameter
- 12-192 optical fibers
- With or without electroding conductor
- Single layer steel wire reinforcement
- Hydrogen protected
- Outer protection polypropylene yarns

Application

The 5-ton SAL is a light protected, single layer armored, loose tube cable for submarine installation where moderate protection is required.

This submarine cable is based on a hermetically sealed stainless tube. Inside the tube the fibers are free to move in a thixotropic water blocking compound. The steel tube is protected by a polyethylene sheath. Outside the sheath there is one layer of galvanized steel wires. The steel wires are flooded in bitumen.


The complete cable is wrapped with a layer of polypropylene yarns.

The steel wire reinforcement provides reliable mechanical protection, enabling installation and operation during rough conditions.

High packing density of the fibers is provided by the loose tube technique. This permits a small outer diameter and easy handling of the cable.

The fibers are colored for easy identification.

Product Information

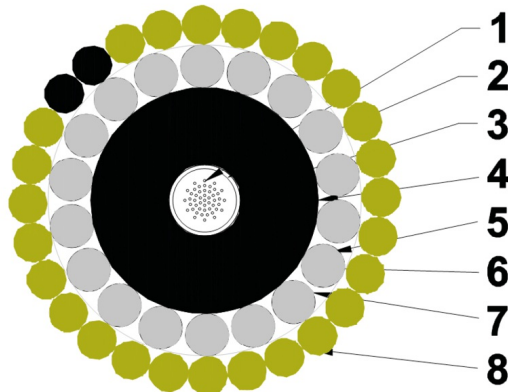

- 1 Primary coated fiber: Silica, acrylate
- 2 Filling compound: Thixotropic compound, hydrogen absorbing
- 3 Tube: Stainless steel
- 4 Sheath: Polyethylene, black
- 5 Armoring: Galvanized steel wires, single layer 18 x ϕ 2.2 mm
- 6 Filling compound: Bitumen
- 7 Wrapping: Plastic tape
- 8 Wrapping: Polypropylene yarns

Technical Information

Tuotteen väri	Yellow with black contrast yarns.
Lämpötila, käyttö [°C]	-30 to +60
Lämpötila, varastointi [°C]	-40 to +70
Lämpötila, asennus [°C]	-15 to +40
Halkaisija Ø [mm]	20
Max. Vedensyvyys [m]	3000
Taivutussäde, ei vetoa [mm]	500
Taivutussäde, vedossa [mm]	1500
Taivutussäde, useita kierroksia [mm]	1500
Paino [kg/km]	800
Paino vedessä [kg/km]	600
Vetolujuus UTS [kN]	60
Vetolujuus FBL [kN]	60
Vetolujuus NTTS [kN]	50
Vetolujuus NOTS [kN]	40
Vetolujuus NTPS [kN]	30
Puristuslujuus [N/100 mm]	10000
Isku [J]	200
Merkintä	The submarine cable is marked with kilometer markers and factory joint markers.
Tekniset tiedot	Mechanical and environmental test in accordance with IEC 60794-1-21 and IEC 60794-1-22
Tilastiedot	<ul style="list-style-type: none"> ▪ Fiber specification ▪ Fiber count ▪ With or without electroding conductor ▪ Fiber color code <p>The cable is supplied in coil, on drum or in container.</p>