



# Subscriber Surface Box – Access Chamber

**The Compact Footprint Surface box. Designed to offer operators a universal modular chamber for housing Subscriber terminations at customer demarcations.**

---

## Features

- Narrow footprint for narrow trenching.
- 285mm Depth with internal rodding/radius bend.
- Self-draining anti-slip surface, Grade C tread depth.
- Load bearing, exceeds Grade C.
- Snap close lid, with provision for security screw fixing.
- Can be embossed, for logo or wording.


## Application

The Underground Chamber can be used as a connection point for Microduct Links. Minimising the effort and investment required to convert a network from homes passed to Homes Connected.

## Technical Information

<b>Tuotteen väri</b>	Black PP Gloss
<b>Lämpötila, käyttö [°C]</b>	-45 to 90
<b>Lämpötila, varastointi [°C]</b>	-45 to 90
<b>Lämpötila, asennus [°C]</b>	-45 to 90
<b>Vaativuuden mukaisuus</b>	Able to withstand loads of up to 5.5kN in accordance with BS 5834-2 testing. Exceeding requirements for a Grade C lid.
<b>Merkintä</b>	Custom Logo Marking available on request

## Technical Details

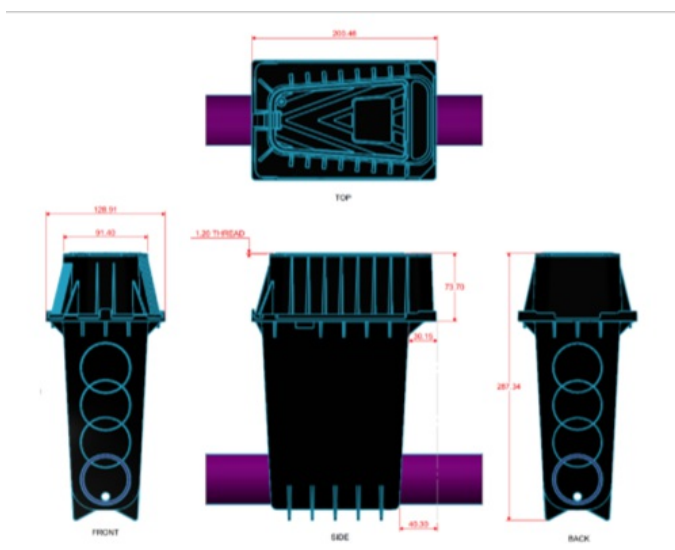

---

## Articles 1

**Article name**

---

<b>285mm Deep Dual entry Toby Box</b> ENPP-TBY-SQ-D285	
---	--