



# Multi-Access Surface Box

**A universal modular chamber for housing Subscriber terminations at customer demarcations.**

---

## Features

- Narrow footprint for narrow trenching.
- x3 25mm conduits can extend from the Toby at either base level or top
- 285mm Depth with internal rodding/radius bend.
- Self-draining anti-slip surface, Grade C tread depth.
- Load bearing, exceeds Grade C.
- Snap close lid, with provision for security screw fixing.
- Can be embossed, for logo or wording.

## Application

The Universal Access Surface Box is developed to improve the customer connection phase. Optimal positioning of Customer surface boxes is not always possible so to 'bridge the gap' and provide a secure route to the customer boundary without the need to dig extension Ducts can be applied. Simple flexible 25mm conduits can extend from the Toby at either base level or top across the gap between Surface box and Customer demarcation.

## Product Information


Alongside the Multi-Access Surface Box, the below items are available to suit your install:

- 10m flexible tube 25mm diameter
- 25mm Temp End caps

## Technical Information

<b>Product Color</b>	Black PP Gloss
<b>Temperature, Operation [°C]</b>	-45 to 90
<b>Temperature, Storage [°C]</b>	-45 to 90
<b>Temperature, Installation [°C]</b>	-45 to 90
<b>Conformance</b>	Able to withstand loads of up to 5.5kN in accordance with BS 5834-2 testing. Exceeding requirements for a Grade C lid.
<b>Marking</b>	Custom branding available on top of lid

## Technical Details

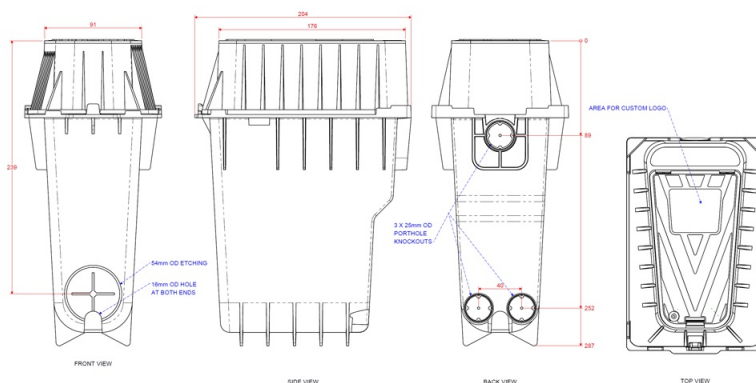

## Articles 3

Article name	Color	Dimensions [mm]
<b>HSBX-TBY-BOX-SQ21</b> HSBX-TBY-BOX-SQ21	Black gloss	285mm
<b>10m flexible tube 25mm Dia</b> FDCT-25MM-FLEX-PP-BLK	-	-
<b>25mm Temp End cap</b> FDCC-25MM-TMP-BL	-	-