

# Microduct Assembly 12/10 mm

TPD 12/10 mm 4-7 way TIA598 Termite Protected

---

## Features

- For installation in existing ducts
- 4 or 7 over-sheathed ducts
- 12/10 mm microducts
- Low friction inner surface for maximum installation lengths
- Longitudinal grooves for maximum installation lengths.
- Termite protected nylon coated microducts

## Application


The tight protected duct assemblies consist of a number of microducts with an inner low friction surface that enables installation of micro cables or nano cables. The duct assemblies are bundled with a single HDPE or PP sheath. The design makes the duct assemblies especially suitable for installation into narrow existing ducts, conduits or pipes occupied with cables or other obstacles. The round structure enables easy splicing and sealing at joints and branch locations. The nylon layer applied to each microduct makes these assemblies suited to termite prone areas even where the outer jacket is removed for branching or routing. The microducts are optimized for best performance in combination with the Hexatronic Viper Micro Cable and Hexatronic Raptor Nano Cables.

## Design

The duct assemblies are available in several versions with 4 or 7 microducts.

12/10 mm microducts are optimized for installation of micro cables and nano cables. The microducts have a low-friction inner surface with longitudinal grooves for best blowing performance.

## Product Information

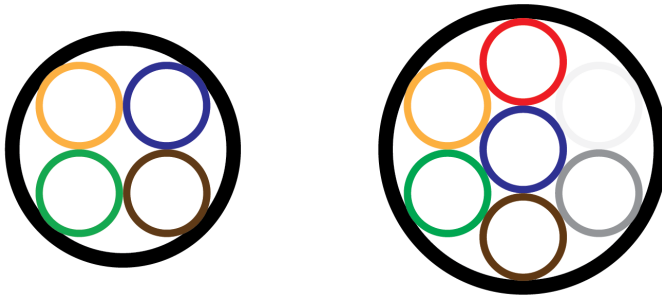

**Microducts:** HDPE and Nylon

**Outer Sheath:** HDPE or PP

## Technical Information

<b>Product Color</b>	Black
<b>Color Code</b>	TIA598
<b>Temperature, Operation [°C]</b>	-40 to +60
<b>Temperature, Storage [°C]</b>	-40 to +60
<b>Temperature, Installation [°C]</b>	-20 to +50

**Conformance**

- Abrasion:** IEC 60794-1-2-E2B(1)
- Kink:** IEC 60794-1-2-E10, 20 x outer diameter
- Impact:** IEC 60794-1-2-E4
- Crush:** IEC 60794-1-2-E3
- Tensile:** IEC 60794-1-2-E
- Bend:** IEC 60794-1-2-E11A
- Torsion:** IEC 60794-1-2-E
- Flexibility:** IEC 60794-1-2-E8
- Inner Clearance:** IEC 60794-5-20, IEC 60794-5-10, Ann. D

**Marking**

Duct assemblies have markings showing the tube length. The individual microducts are identified by their colours according to the TIA standard. The assemblies come with a black outer sheath, or with a customised outer sheath colour by special order.

**Technical Details**

TIA-598 Microducts 1-24	1	2	3	4	5	6	7	8	9	10	11	12
	Blue 1	Orange 1	Green 1	Brown 1	Slate 1	White 1	Red 1	Black 1	Yellow 1	Violet 1	Rose 1	Aqua 1
	13	14	15	16	17	18	19	20	21	22	23	24
	Blue 2	Orange 2	Green 2	Brown 2	Slate 2	White 2	Red 2	Black 2	Yellow 2	Violet 2	Rose 2	Aqua 2

TIA 598 Color Code Chart for Microduct Assemblies

## Articles 2

Article name	Color	Layout	Bend Radius [mm]	Tensile Force [N]	Crush [N/100 mm]	Impact [J]	Dimensions [mm]	Weight [kg/km]
<b>Microduct 4x12/10 DI TIA PA</b> MPB30327/4B	Black	4x12/10	330	2300	1000	3	33	310
<b>Microduct 7x12/10 DI TIA PA</b> MPB30327/7B	Black	7x12/10	400	4400	1000	3	40.2	502