

RAPTOR™



High Performance Nano Cable

GAHL 2-12 fibers, GAL 12 fibers G657A1 S12 - No Ripcord

Features

- Quick and easy sheath removal and fiber separation
- Slim design for installation into microducts down to 3.5mm inner diameter
- Installation by blowing or pushing
- Extra strong and durable, with integrated strength member
- Smooth, low-friction sheath
- Extra wide operational temperature range, -45 to +70°C
- Excellent installation performance
- Halogen-free

Application

The Hexatronic Raptor is a high performance Air Blown Nano Cable that will minimize initial investment and at the same time provide a future proof network that is easy to expand, upgrade and maintain.

The main application areas are for fiber access networks such as Fiber To The Home (FTTH) and Fiber To The Antenna (FTTA). The cable is intended for installation in microducts with an inner diameter from 3.5mm up to 12mm.


Design

The Hexatronic Air Blown Nano Cable has a unique design that offers a combination of properties previously not available on the market. A sturdy fiber unit with state of the art fiber blowing performance increases the installation success rate and provides quick and problem free installation. With the integrated strength member, the cable is ideal for both blowing and pushing. The strength member also adds increased stability and robustness to the cable.

The cable is available with single mode bend resistant G657A1 fibers.

This new MKII version of the Hexatronic Raptor Nano Cable series has several improvements that saves time and costs during installation. Sheath removal and fiber separation is highly enhanced without the need for a ripcord.

Product Information

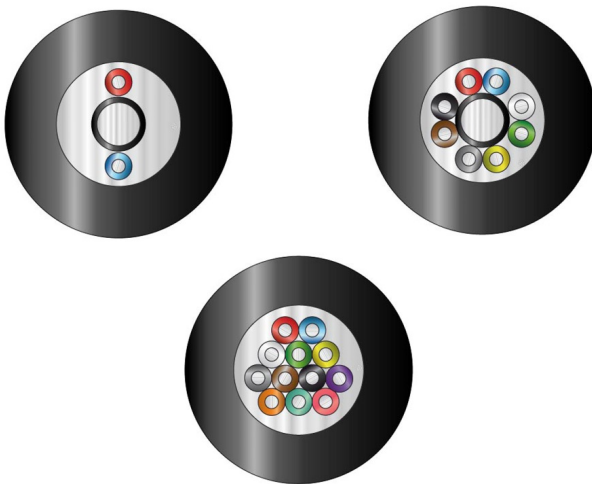

- 1 Primary coated fiber: Silica, acrylate
- 2 Buffer: UV-cured polymer layer
- 3 Strength member: Coated glass fiber reinforced plastic
- 4 Low friction thermoplastic

Technical Information

Product Color	Black Sheath
Color Code	S12
Temperature, Operation [°C]	-45 to +70
Temperature, Storage [°C]	-45 to +70
Temperature, Installation [°C]	-15 to +60
Fiber Type	G657A1
Attenuation @Wavelength [nm]	1310/1383/1550
Average Attenuation [dB/km]	0.31/0.31/0.20
Maximum Attenuation [dB/km]	0.38/0.38/0.25
Marking	Example of sheath marking, 1 time/meter: "HEXATRONIC A35 yymmddhh TOL4019080/8AH GAHL-K-DHR 8/A8 G657A1 S12" where yymmddhh = year, month, day and hour of manufacture, xxxx=running meter marking.
Installation Notes	The cable is intended for installation in microducts with an inner diameter from 3.5mm up to 12mm. The cable should be installed at a temperature between -15 to +40°C. The cable shall not be stored in direct sunlight. The sun may heat up the cable over the permitted temperature limit.
Ordering Information	Supplied lengths: 1, 2, 4 km

Technical Details

S12 Fibers och rör Fibers and Tubes	1	2	3	4	5	6	7	8	9	10	11	12
	Röd Red	Blå Blue	Vit White	Grön Green	Gul Yellow	Grå Grey	Brun Brown	Svart Black	Violett Violet	Orange	Turkos Turquoise	Rosa Pink
	13	14	15	16	17	18	19	20	21	22	23	24
	Röd Red	Blå Blue	Vit White	Grön Green	Gul Yellow	Grå Grey	Brun Brown	Klar Clear	Violett Violet	Orange	Turkos Turquoise	Rosa Pink

Articles 15

Article name	EL.-No.	Color	No. of Fibers	Layout	Bend Radius [mm]	Tensile Force [N]	Crush [N/100 mm]	Impact [J]	Installation [N]	Diameter Ø [mm]	Weight [kg/km]	Length [m]
GAHL 2/A2 G657A1 S12 TOL4019080/2AH		Black	2	1x2	25	80	700	1	2.0	4.3	4000/PLAST	
GAHL 2/A2 G657A1 S12 T2000 H4019080/2AH-3		Black	2	1x2	25	80	700	1	2.0	4.3	2000/K4	
GAHL 2/A2 G657A1 S12 T4000 H4019080/2AH-4	1001347	Black	2	1x2	25	80	700	1	2.0	4.3	4000/K4	
GAHL 4/A4 G657A1 S12 TOL4019080/4AH		Black	4	1x4	25	80	900	0.5	2.0	5	4000/PLAST, 2000/PLAST	
GAHL 4/A4 G657A1 S12 T2000 H4019080/4AH-3	1001348	Black	4	1x4	25	80	900	0.5	2.0	5	2000/K4	
GAHL 4/A4 G657A1 S12 T4000 H4019080/4AH-4	1001348	Black	4	1x4	25	80	900	0.5	2.0	5	4000/K4	
GAHL 6/A6 G657A1 S12 TOL4019080/6AH		Black	6	1x6	25	80	900	0.5	2.0	5	4000/PLAST	
GAHL 6/A6 G657A1 S12 T2000 H4019080/6AH-3		Black	6	1x6	25	80	900	0.5	2.0	1	2000/K4	
GAHL 6/A6 G657A2 S12 T4000 H4019080/6AH-4		Black	6	1x6	25	80	900	0.5	2.0	1	4000/K4	
GAHL 8/A8 G657A1 S12 TOL4019080/8AH		Black	8	1x8	25	80	900	0.5	2.0	6.5	4000/PLAST	
GAHL 8/A8 G657A1 S12 T2000 H4019080/8AH-3		Black	8	1x8	25	80	900	0.5	2.0	6.5	2000/K4	
GAHL 8/A8 G657A1 S12 T4000 H4019080/8AH-4		Black	8	1x8	25	80	900	0.5	2.0	6.5	4000/K4	
GAL 12/A12 G657A1 S12 TOL4019080/12AH		Black	12	1x12	35	50	1000	0.7	2.1	8	6000/PLAST, 4000/PLAST	
GAL 12/A12 G657A1 S12 T2000 H4019080/12AH-3	1001349	Black	12	1x12	35	50	1000	0.7	2.1	8	2000/K4	
GAL 12/A12 G657A1 S12 T4000 H4019080/12AH-4	1001349	Black	12	1x12	35	50	1000	0.7	2.1	8	4000/K4	