

ADSS Loose Tube Aerial Cable

GRHSLDV 12-144 fibers G652D StdE 4.0 kN

Features

- Slim and low weight
- Dry construction
- Self-supporting
- Dielectric
- Halogen-free
- Maximum span length of 60-170 meters

Application


The cable is an ADSS, non-metallic cable using concentric core design. The cable utilizes aramid yarn as strength member. This extremely slim and low weight cable is suitable for a maximum span length of 60-170 meters. It can be installed adjacent to power lines up to 120 kV.

The cable is part of our Aerial Cable System comprising cables, installation and network materials.

Design

The cable is a non-metallic cable using concentric core design and aramide yarns as strength member.

Product Information

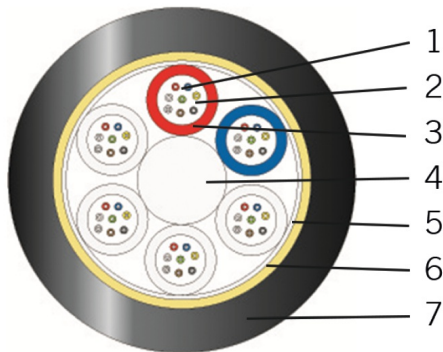

- 1 Primary coated fiber: Silica, acrylate
- 2 Filling compound: Thixotropic gel
- 3 Loose tube: PBT
- 4 Central strength member: Glass fiber reinforced plastic, PE
- 5 Water blocking: Swellable tape
- 6 Strength member: Aramide yarns
- 7 Sheath: Polyethylene, Black

Technical Information

Product Color	Green Jacket
Color Code	STDE
Water Blocking	Longitudinal water blocking according to IEC 60794-1-2-F5.
Fiber Type	G652D
Attenuation @Wavelength [nm]	1310/1550/1625

Maximum Attenuation [dB/km]	0.36/0.23/0.25
Conformance	<p>Longitudinal water blocking according to IEC 60794-1-2-F5.</p> <p>Mechanical and environmental tests in accordance with IEC 60794-1.</p> <p>Fiber parameters and tests according to the IEC series 60793-2 and 60793-1.</p>
Marking	<p>Example of sheath marking, 1 time/meter:</p> <p>"HEXATRONIC A35 yymmddhh TOL4032003/96A GRHSLDV 96 G.652.D xxxx m"</p> <p>where yymmddhh = year, month, day and hour of manufacture, xxxx=running meter marking.</p>
Ordering Information	Supplied lengths: 2, 4, 6 or 8 km

Technical Details

Std-E Fibers	1	2	3	4	5	6	7	8	9	10	11	12
	Red	Blue	White	Green	Yellow	Grey	Brown	Black	Orange	Violet	Pink	Turquoise
	13	14	15	16	17	18	19	20	21	22	23	24
	Red	Blue	White	Green	Yellow	Grey	Brown	Clear	Orange	Violet	Pink	Turquoise

Std-E Tubes	1	2	3-6				7	8-16				
	Red	Blue	White				Blue	White				

Articles 7

Article name	No. of Fibers	Layout	Crush [lbs/4"]	Diameter Ø [mm]	Weight [lbs/100ft]	Length [ft]
GR-SLDV 8 G652D4 kN-11,7 mm TOL4032003/8A	8	2x4	1500	11.5	0.1	—
GR-SLDV 12 G652D4 kN-11,7 mm TOL4032003/12A	12	3x4	1500	11.5	0.1	—
GR-SLDV 24 G652D4 kN-11,7 mm TOL4032003/24A	24	6x4	1500	11.5	0.1	8000/K18, 6000/K16
GR-SLDV 36 G652D4 kN-11,7 mm TOL4032003/36A	36	6x6	1500	11.5	0.1	—
GR-SLDV 48 G652D4 kN-11,7 mm TOL4032003/48A	48	4x12	1500	11.5	0.1	8000/K18, 6000/K16
GR-SLDV 72 G652D5 kN-13,4 mm TOL4032003/72A	72	6x12	1500	13.4	0.13	—
GR-SLDV 96 G652D5,5 kN-15,4 mm TOL4032003/96A	96	8x12	1500	15.4	0.17	4000/K18, 6000/K20, 8000/K22