

Indoor/Outdoor Dual Purpose Subscriber Drop Cable

1-4f Dual Jacket, G657B3, CPR Cca

Features

- G657B3 Bend insensitive fibre
- Tight buffered
- UV stable outer jacket
- Small cable outer diameter
- Aramid yarn high tensile strength
- Inner LSZH cables compliant to Cca -s1a, d0 -a1
- Compliant to directive 2002/95/EC (RoHS)

Application

Drop cable for indoor/outdoor FTTx applications.

The drop cable is primarily intended for direct installation, i.e. installation with clips or routing inside cable raceways and mouldings. This installation technique puts extra tough requirements on the cables in terms of bend performance, crush resistance and other mechanical parameters.

The drop cable has extremely good bend performance due to the G657B3 fiber and the built in bend restriction of the cable design.

Design

The Hexatronic FTTx Internal / External FTTx Drop cable meets of indoor fibre optic distribution requirements and is CPR rated to Cca when the outer UV stable Jacket is removed. Crush resistant and suitable for installation with a bend radius down to 7.5mm.

Product Information

- 1 Optical fiber
- 2 Tight buffer
- 3 Inner strength member
- 4 Inner jacket
- 5 Outer strength member
- 6 Outer jacket

Technical Information

Tuotteen väri	Black
Värijärjestys	TIA598
Lämpötila, käyttö [°C]	-20 to +70
Lämpötila, varastointi [°C]	-15 to +70
Lämpötila, asennus [°C]	-20 to +70
Vedenesto	Length water blocking according to IEC 60794-1-2-F5C (Outer jacket only)
Palo-ominaisuudet	Cca -s1a, d0 -a1, IEC 60332-1 (inner jacket)
Kuidun tyyppi	G657B3
Vaimennus @Aallonpituudella [nm]	1310/1550
Max. vaimennus [dB/km]	0.40/0.30

Vaatimustenmukaisuus

Tensile, short term - IEC 60794-1-21, E1

Tensile, long term - IEC 60794-1-21, E1

Abrasion, cable sheath - IEC 60794-1-21, E2A

Abrasion, cable sheath marking - IEC 60794-1-21, E2B

Crush - IEC 60794-1-21, E3A

Impact - IEC 60794-1-21, E4

Bend, multiple turns - IEC 60794-1-21, E11A

For details on test conditions, contact Hexatronic.

Sertifikaatit

Cca -s1a, d0 -a1 (Inner cable)

RoHS 2002/95/EC

Merkintä

Example of sheath marking, 1 time/meter:


"HEXATRONIC XXX yymmddtt TOL4063035/1C 1F

G657B3 TIA-598 Cca-s1a,d0,a1 xxxx m"




where XXX = plant code, yymmddhh = year, month, day of manufacture, xxxx=running meter marking

Asennustiedot

To enable flame resistance for indoor installations, the black outer jacket shall be removed. The jacket shall not be removed for sections installed outdoors.

Technical Details**CONSTRUCTION****Simplex 1F**

Test	Condition	Criteria	Specification
Tensile strength	Applicable tensile load are followed by table 2.	after: ≤ 0.2 dB	IEC 60794-1-21-E1
Crush	Load _{max} =1000N/10 cm, 5min., 3point	after: ≤ 0.2 dB	IEC 60794-1-21-E3
Impact	5J, 1impact, 3point	after: ≤ 0.2 dB	IEC 60794-1-21-E4
Repeated Bend	3bend, 3cycles, 15xD.	after: ≤ 0.2 dB	IEC 60794-1-21-E6
Torsion	$\pm 180^\circ$, 2m, 10 cycle, under load 5N	after: ≤ 0.2 dB	IEC 60794-1-21-E7
Bend	$\pm 180^\circ$, 20xD, 10 cycle	after: ≤ 0.2 dB	IEC 60794-1-21-E11
Temperature cycling test	- Temperature +20°C → -20°C → +70°C +20°C	after: ≤ 0.2 dB/km	IEC 60794-1-22-F1
Water Penetration	1m height, 3m length, 24hr	No leakage of water	IEC 60794-1-22-F5B
UV resistance test	300hrs, xenon-arc, 1cycle	$\geq 85\%$	UL 1581
Flame retardant	$\geq 85\%$	UL 1581	IEC 60332-1-2

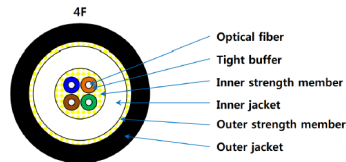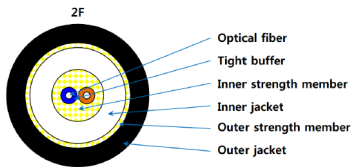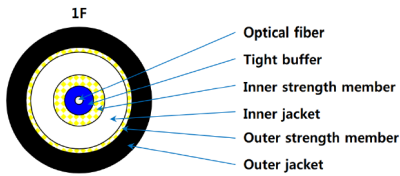

Articles 3

Article name	Väri	Kuitujen lkm	Asettelu	Täivutusäde [mm]	Vetolujuus, asennettaessa [N]	Vetolujuus, asennettuna [N]	Puristuslujuus [N/100 mm]	Isku [J]	Halkaisija Ø [mm]	Paino [kg/km]	Toimitustapa
Drop cable Dual jacket ID/OD 1f G657B3 TOL4063035/1C	Black/White	1	1 × 900 μm	45	700	200	1000	5	4.5 / 3	21	1000 mreel
Drop cable Dual jacket ID/OD 2f G657B3 TOL4063036/2C	Black/White	2	2 × 600 μm	52	1000	200	1000	5	5.2 / 3.5	28	1000 mreel
Drop cable Dual jacket ID/OD 4f G657B3 TOL4063036/4C	Black/White	4	4 × 600 μm	52	1000	200	1000	5	5.2 / 3.5	28	1000 mreel