



## Multi-Access Surface Box

---

### Product Overview

The Universal Access Surface Box is developed to improve the customer connection phase. Optimal positioning of Customer surface boxes is not always possible so to 'bridge the gap' and provide a secure route to the customer boundary without the need to dig extension Ducts can be applied. Simple flexible 25mm conduits can extend from the Toby at either base level or top across the gap between Surface box and Customer demarcation.

### Features

- Narrow footprint for narrow trenching.
- x3 25mm conduits can extend from the Toby at either base level or top
- 285mm Depth with internal rodding/radius bend.
- Self-draining anti-slip surface, Grade C tread depth.
- Load bearing, exceeds Grade C.
- Snap close lid, with provision for security screw fixing.
- Can be embossed, for logo or wording.


### Technical Information

Product colour	Black PP gloss
Temperature operation	-45 to 90
Temperature storage	-45 to 90
Temperature installation	-45 to 90

#### Conformance:

Able to withstand loads of up to 5.5kN in accordance with BS 5834-2 testing. Exceeding requirements for a grade C lid.

## Technical Details

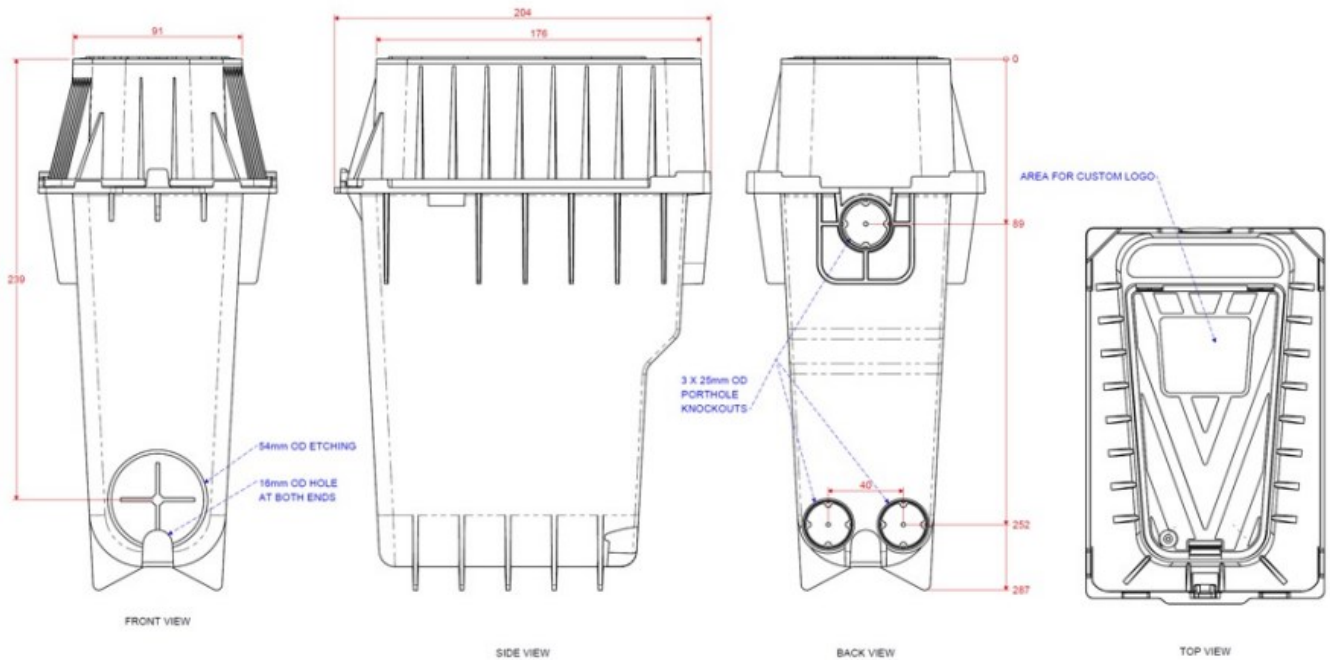

### Ordering Information

Part number	Description
HSBX-TBY-BOX-SQ21	Toby/Footpath demarcation box Black
FDCT-25MM-FLEX-PP-BLK	10m roll of 25mm dia flex tubing
FDCC-25MM-TMP-BL	Temporary duct end cap 25mm dia