

10011982 - FTTP MDU MDR Level 4 Wall Box - Large

Product Overview

The closure is equipped with a Patch Panel with capacity for up to 48 end user connections. The splicing capacity of the wallbox enables up to 96 Splices on both the Network side and Access Side.

The trays are arranged in a 6 + 6 configuration, 6 x Network and 6 x Access. Each tray has a capacity of 16 x single splice sleeves.


The Enclosure is equipped with a lockable front door and a hinged mounting plate to maximise cabling efficiency. Modular cable entrances of 'slide in' type are mounted at the top and bottom of the closure. This allows for quick and easy installation of virtually any type of cable or microduct

Specifications

Type	Indoor closure, wall mounted
Dimensions	495 mm x 375 mm x 180 mm
Sealing	IP Class 54
Capacity	96 connectors (SC)

Features

- IP54 Indoor/Outdoor
- 48 Subscribers
- 48 individual drop ports
- Lockable
- Front serviced

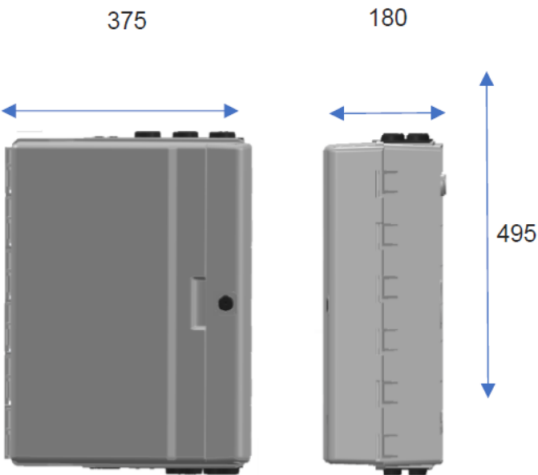

Ordering Information

Part number	Description
FCLW-L-ML4-SPL-12X48-ALC	FTTP MDU MDR Level 4 Wall Box - Large - 25 to 48 Subscribers - Splice/ Patch/Split - Ftd With 12x 1x4 Splitters Terminating on 48x LC/APC Adapters - Indoor / Outdoor Use