




HEXATRONIC

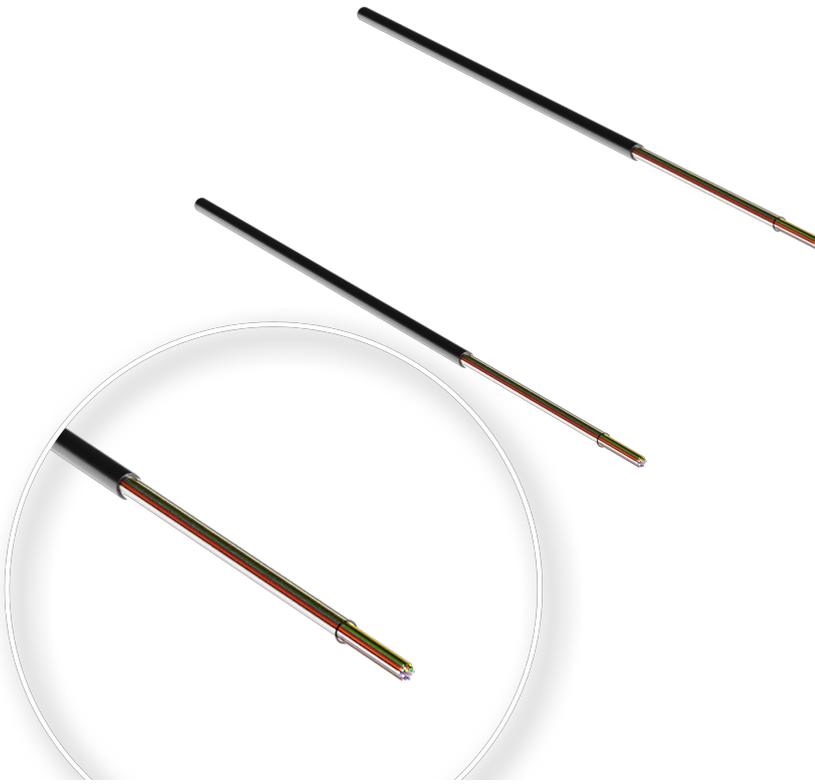

# High Performance Nano Cable – 24 fibers, Super Slim, 200 $\mu\text{m}$ fibers

**GPL 24 fibers, G657A1 200  $\mu\text{m}$**

---

## Features

- 24 fiber ultra slim cable for microducts down to 3.5mm inner diameter
- Extra slim with 200  $\mu\text{m}$  fibers
- Installation by blowing
- Extra strong and durable
- Smooth, low-friction sheath
- Excellent installation performance
- Available with bend resistant fiber, G657A1  
Temperature range from -20 to +70°C

- Halogen-free

## Application

Hexatronic's high performance Air Blown Nano Cable will minimize initial investment and at the same time provide a future proof network that is easy to expand, upgrade and maintain. The main application areas are for fiber access networks such as Fiber To The Home (FTTH) and Fiber To The Antenna (FTTA). The cable is intended for installation in microducts with an inner diameter from 3.5mm up to 12mm. Optimal installation performance is obtained with ducts ID 5-10mm

## Design

The new Hexatronic Air Blown Nano Cable has a unique design that offers a combination of properties previously not available on the market. A sturdy fiber unit with state of the art fiber blowing performance increases the installation success rate and provides quick and problem free installation. The cable is available with single mode bend resistant G657A1 200 µm fibers.

## Product Information



- 1 Primary coated fiber: Silica, acrylate
- 2 Filling compound: Thixotropic gel
- 3 Loose tube: Polymer
- 4 Sheath: Polyethylene, halogen-free

## Technical Information

<b>Product Color</b>	Black Sheath
<b>Temperature, Operation [°C]</b>	-20 to +70
<b>Temperature, Storage [°C]</b>	-25 to +70
<b>Temperature, Installation [°C]</b>	-15 to +60
<b>Fiber Type</b>	G657A1
<b>Attenuation @Wavelength [nm]</b>	1310/1550
<b>Average Attenuation [dB/km]</b>	0.36/0.22

**Maximum Attenuation [dB/km]** 0.38/0.25

**Marking** Example of sheath marking, 1 time/meter: "HEXATRONIC A35 yymmddhh TOL4019072/24 GPL-K-DGV 24/T24 G657A1 xxxx m" where yymmddhh = year, month, day and hour of manufacture, xxxx=running meter marking.

**Installation Notes** The cable is intended for installation in microducts with an inner diameter from 3.5mm up to 12mm. Optimal installation performance is obtained with - Ducts ID 5-10mm.  
The cable should be installed at a temperature between -15 to +40°C. The cable shall not be stored in direct sunlight. The sun may heat up the cable over the permitted temperature limit.

**Ordering Information** Supplied lengths: 2, 4 km

## Articles 1

Article name	Color	No. of Fibers	Layout	Bend Radius [mm]	Tensile Force [N]	Crush [N/100 mm]	Diameter Ø [mm]	Weight [kg/km]
GPL 24/T24 G657A1 200 µm TOL4019072/24	Black	24	1x24	40	50	300	2.1	3.6